


Barry Stoodley Pty Ltd

JUST

JSK 37 EW FIFTH WHEEL COUPLING 2" Pivot bearing Low Maintenance

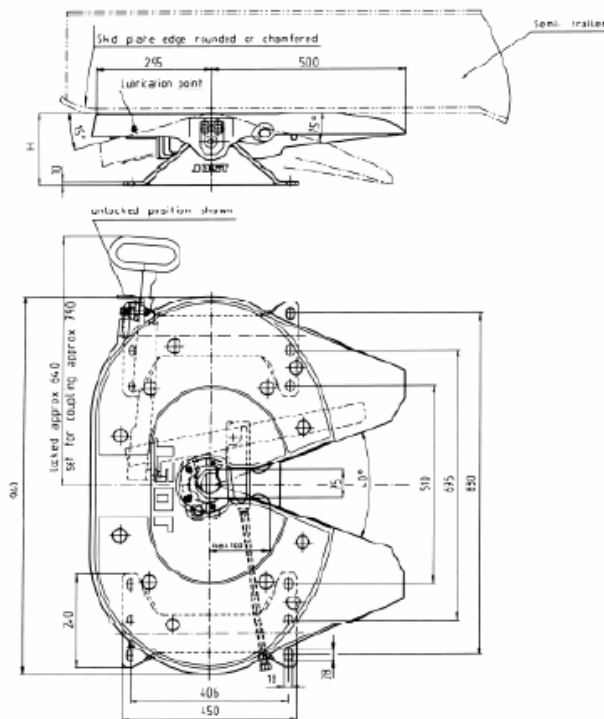

Applications: Highway work Tipper Work

Low maintenance fifth wheel coupling:

- maintenance free top plate
- maintenance free rubber cushioned pivot bearings
- maintenance free wear ring
- only one remaining grease point the lock jaw (little grease required)

Lock jaw and wear ring can be replaced without difficulty in a few minutes with the fifth wheel still in position.

Available with extended operating handle (240mm) on demand.

Mounting must be carried out in accordance with our instructions.

Mounting hole pattern in accordance with DIN standard 74081 and ISO standard 3842. Suitable for all types of rear axle steering systems.

Type	Overall height mm	Imposed Load on tractor kg	D-value kN	Weight approx. kg	Pedestal Style	CRN
JSK 37 E150mm	150	20000	162.4	133	Bolt-on	24830
JSK 37 E170mm	172	20000	162.4	135	Bolt-on	
JSK 37 E185mm	185	20000	162.4	136	Bolt-on	
JSK37 E135X	135	20000	162.4	123.50	Bolt-on	
JSK37 E150X	150	20000	162.4	123.50	Weld on	
JSK37 E170X	170	20000	162.4	128.50	Weld on	
JSK37 E185X	185	20000	162.4	128.50	Weld on	
JSK 37 E195mm	195	20000	162.4	130	Weld on	
JSK37 E205X	205	20000	162.4	131.50	Weld on	
JSK37 E235X	235	20000	162.4	133.50	Weld on	
JSK37 E255X	255	20000	162.4	136.50	Weld on	

The right to alter specifications is reserved.